

HOL-TEC

Tectuprint has developed this equipment for the security sector, **HOL-TEC** with his hot head, allows applying holograms at registration with a variety of different sizes.

Its transfer capacity is highly valued in the field of personalization, making a high quality and variation of foils and holograms.

FEATURES

Max paper width:.....500 mm

Paper traction:.....by pin tractors

Traction format:from 4 to 24 inches

Change of format:.....program in decimas milimeter

Change of format,
longitudinal paper adjustment

and hologram adjustment:by electronic control

Maximum Printing area size:100 x 100 mm

Maximum hologram size:100 x 100 mm


Maximum Car pressure

contact force.....790 Kg @ 6 Bar

Verier adjustment:.....planarity of the
printingtable and
transfer pressure

Temperature control:digital by microprocessor,
PID technology

Transfer time:electronically programmable

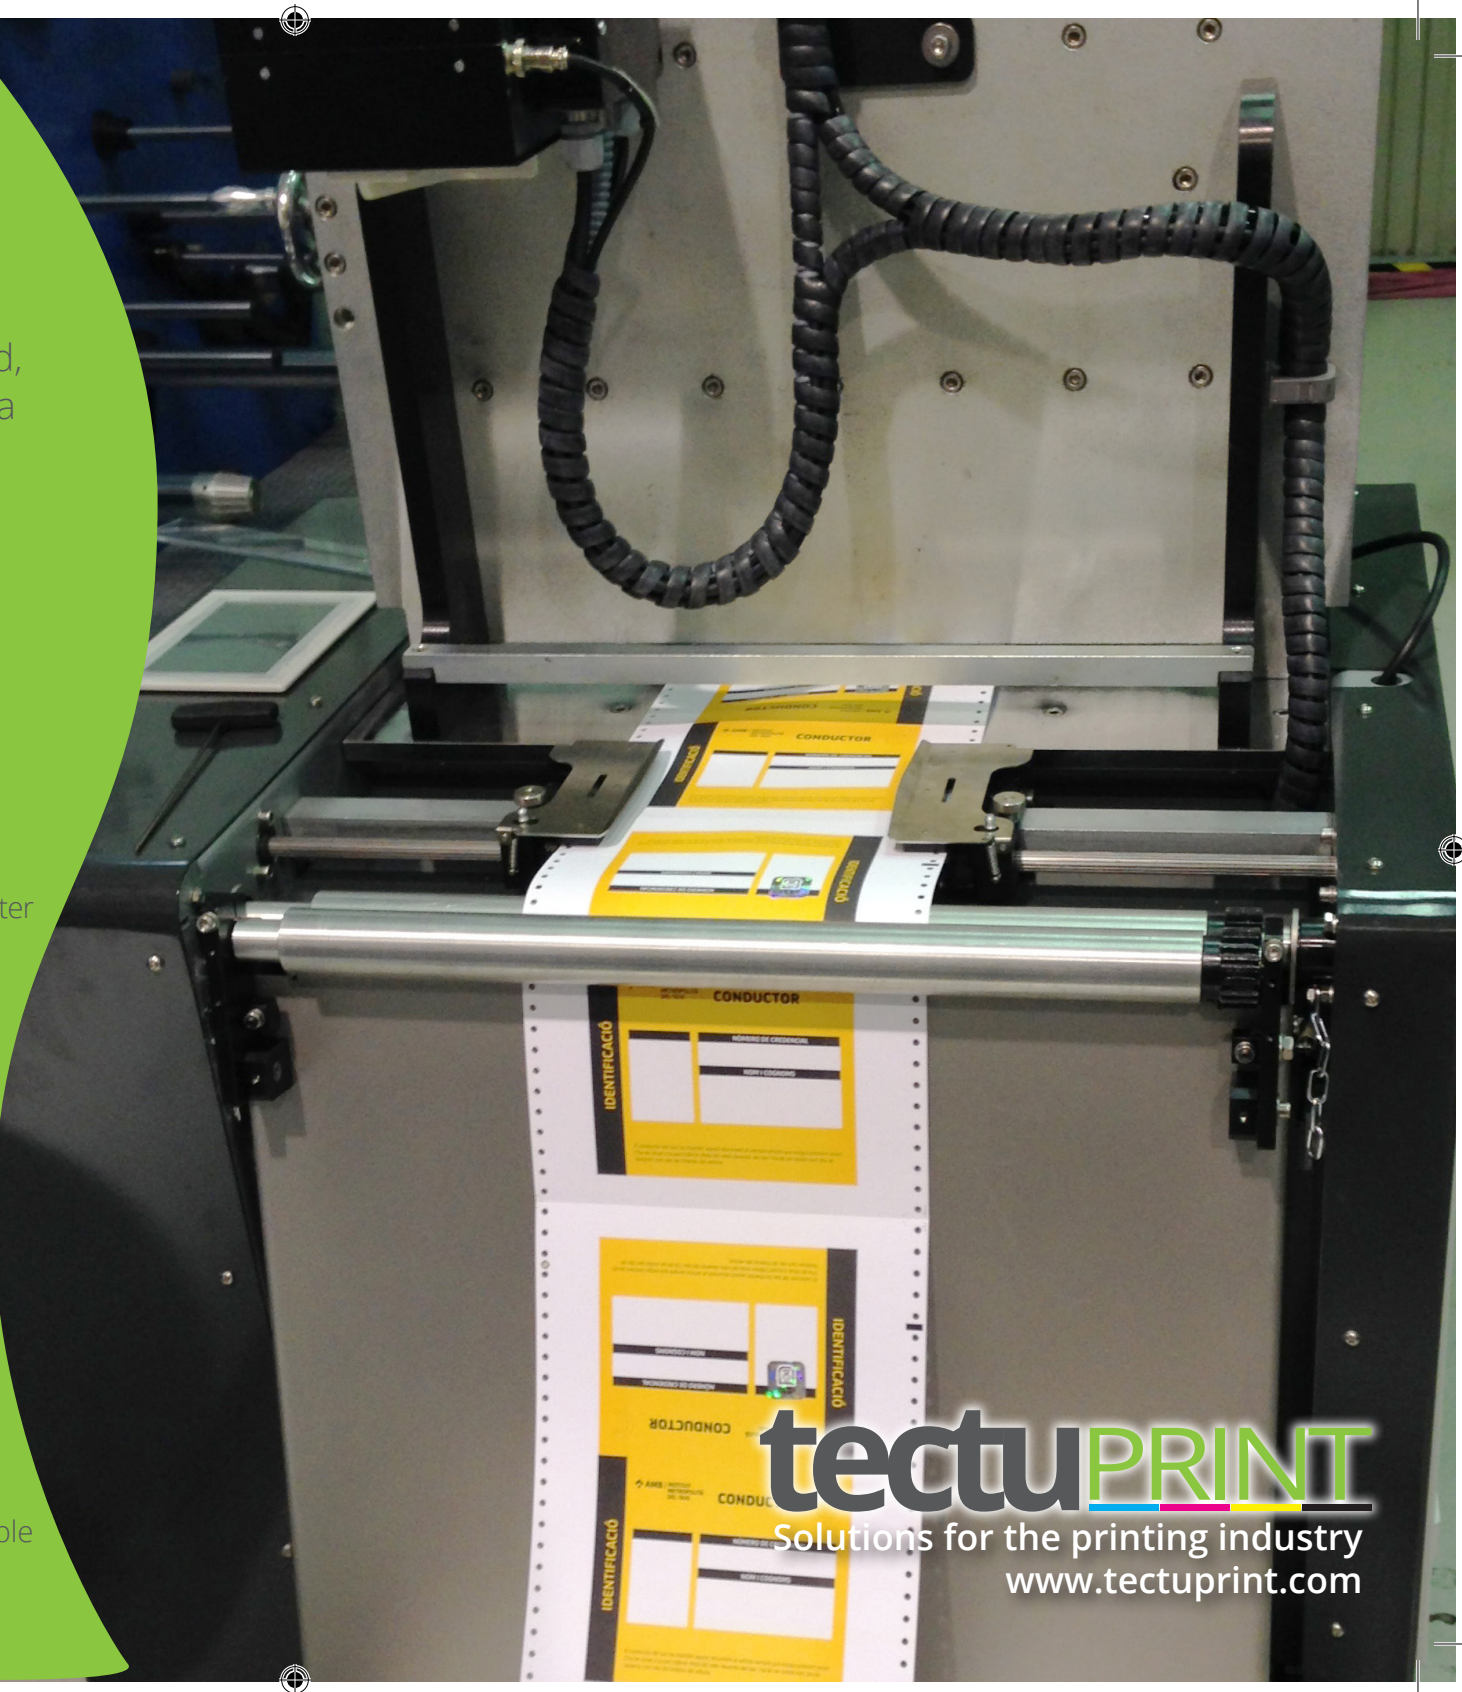

tectuPRINT
Solutions for the printing industry
www.tectuprint.com

Photocell for:.....hologram adjustment
Reading (optional)

Max speed:.....3600 stamps/hour
(variable according
to transfer time and
format)

Compressed air:.....6 bars , 85 liters/min,
3600 stamps/hour

Power supply:3X400V +N+T 50/60
Hz , 2500VA

Machine dimensions:800 mm length, 1150
mm width, 1500 mm
height

Folder dimensions:length 1000 mm, width
700 mm x height 1500
mm

Total weight:.....approximately 480 kg



tectuPRINT **ERIEC**

Solutions for the printing industry
www.tectuprint.com

Pol. Ind. Casablanques C/ Empordà nº 29
09192 Sant Quirze del Valles, Barcelona (Spain)
Phone. +34 937-221-664 · Fax. +34 937-310-588 · info@tectuprint.com